

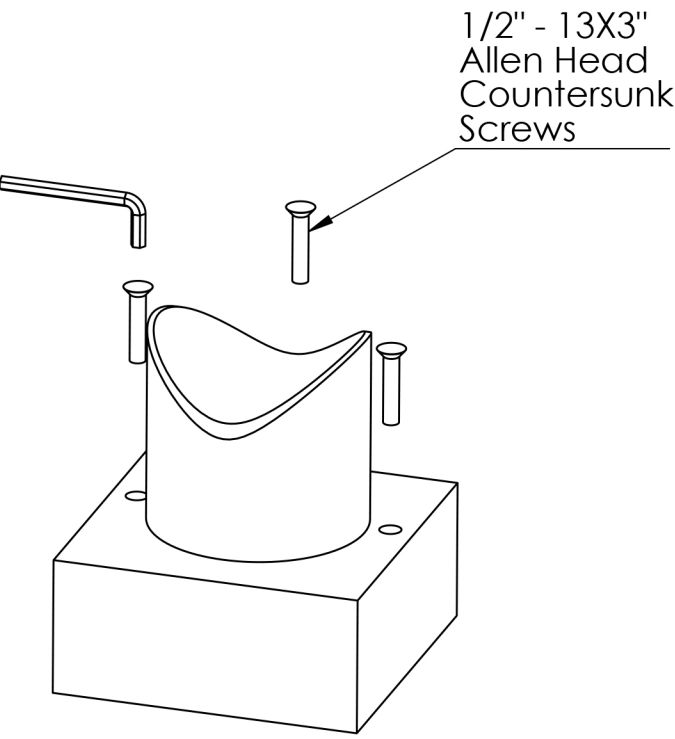
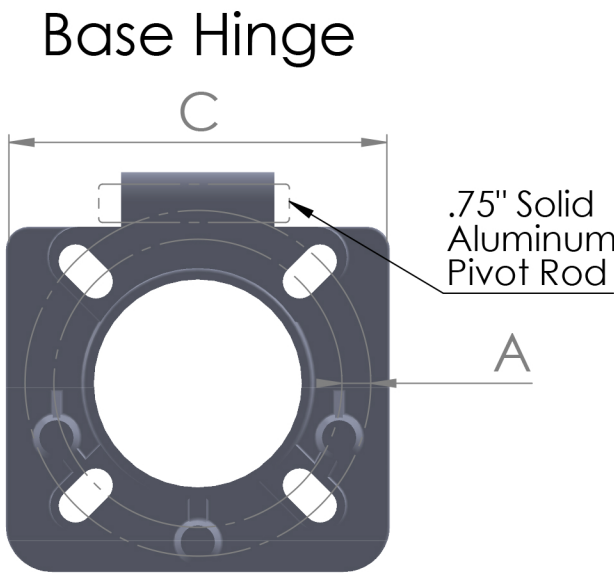


Aeolus Series  
Hinge Base External  
HB20X-HB30X

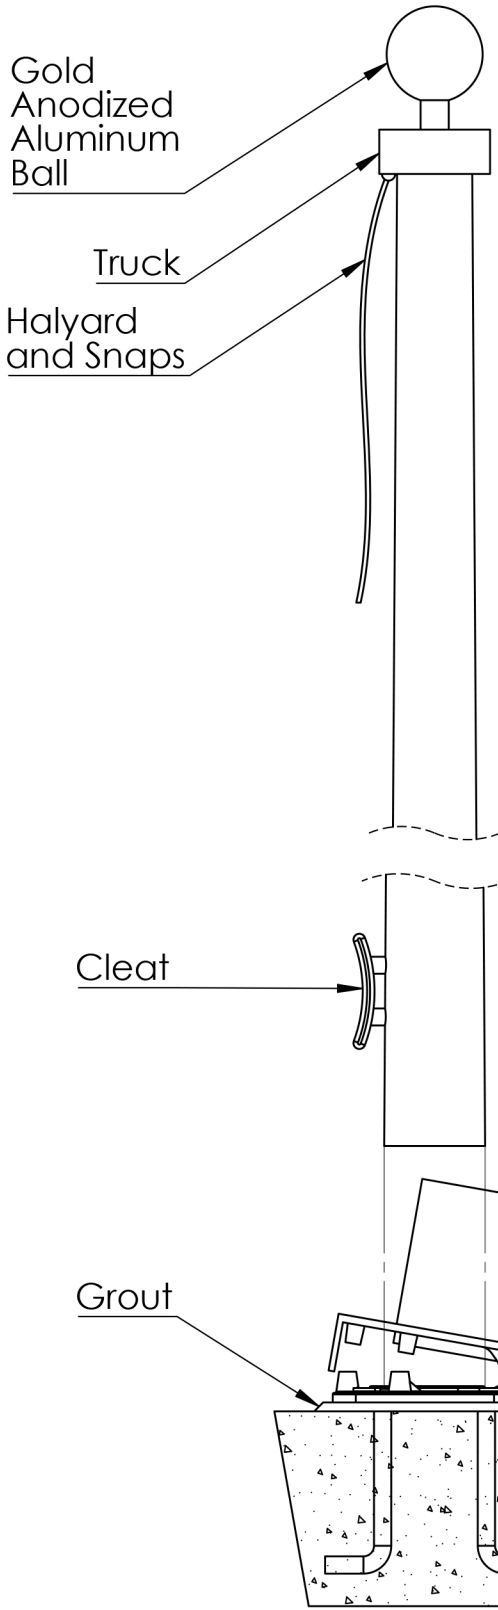

Fiberglass Stationary  
External Truck

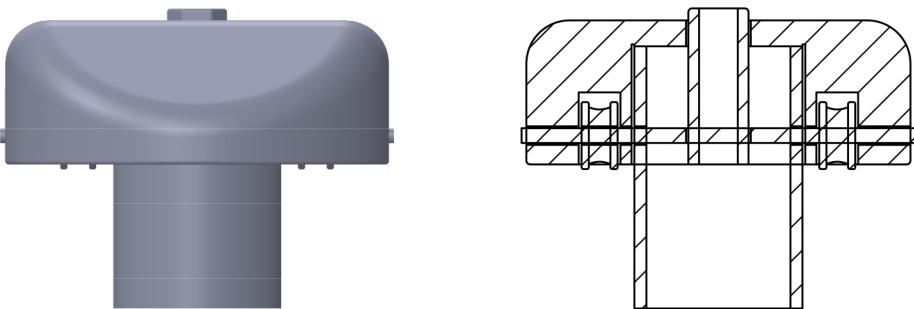

Specifications and Accessories

Model	HB20X	HB25X	HB30X
Above Ground Height	20'	25'	30'
Butt Diameter	5.75"	6.5"	6.5"
Top Diameter	3"	3"	3"
Pole Weight with Base (lbs)	52	72	89
Shipping Weight with Base(lbs)	105	118	141
Cleat	8.5" NY	8.5" NY	8.5" NY
Gold Anodized Ball	5"	5"	6"
Halyard	40' of #10	50' of #10	#10
Truck	F/G	F/G	F/G
Brass Snaps	1 pair	1 pair	1 pair
Anchor Bolt Length (sold separate)	24"	24"	24"
Bolt Diameter	3/4"	3/4"	3/4"
Exposed Thread Projection	3"	3"	3"
Bolt Circle (A)	7.5"-9"	8.5"-9"	8.5"-9"
Base Dimensions (B&C)	3.5" h x 10.5" w		
Standard Flag Size	4'X6'	4'X6'	5'X8'
Vinyl Cover	1 pair	1 pair	1 pair

## Specifications

Provide a Fiberglass Reinforced Composite (FRC) Hinge Base flagpole Model # **HB 30X** as manufactured by PLP Composites, Fitzwilliam, NH 03447.

The flagpole shall have a mounting height of 30'.

The butt diameter shall be 6.5" and the top diameter 3". The pole weight shall be approximately 89 lbs. and a total shipping weight of 141 lbs.

The flagpole shall be manufactured of fiberglass woven roving and polyester resin with 75% of the reinforcing fibers oriented in the axial plane for maximum stiffness and 25% in the radial plane for required hoop strength. Load calculations shall be based on AASHTO and NAAMM standards with the pole designed with a two to one (2:1) safety factor for 125 mph winds, unflagged, with a 1.3 gust factor.

The flagpole shall have an Entasis taper and shall be void of vertical mold seams.

The flagpole shall be sanded smooth and coated with a high gloss Aliphatic Polyurea coating system which provides extended UV protection and weatherability.

**Standard colors include:** White, Black, Bronze, Faux-Luminum, & Metallic Bronze

The base requires four anchor bolts with covers and two nuts, two flat washers, and one lock washer per anchor bolt as follows: (sold separately)

- 3/4"x24" anchor bolt
- 3" exposed thread projection recommended



Aeolus Series - Model #HB 30X	Standard Fittings:		Project:
30' Above Grade Height	Gold Anodized Ball	#10 Polyester Halyard	
10.5" Sq. Aluminum Hinge Base	Cast FG Stationary Truck	8.5" Nylon Cleat	Location:
Top Diameter - 3"	1 pair of Brass Snaps	Bolt Template	
Butt Diameter - 6.5"	1 pair of Vinyl Covers		Date:

**PLP Composites**

57 Creamery Road - PO Box 429, Fitzwilliam, NH 03447 - Phone: 800-262-6075 - [www.plpcomp.com](http://www.plpcomp.com) or [www.zeusflagpoles.com](http://www.zeusflagpoles.com) - [info@plpcomp.com](mailto:info@plpcomp.com)